




THILE

THM

Monitor

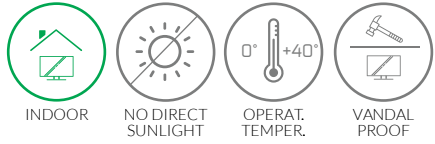

The indoor THM monitor is particularly suitable for dynamic message applications in retail. Display size ranges from 32" to 65" with or without touch, with an ultra slim profile and only 5 cm depth, including housing for media player, electrical components making it one of the slimmest units on the market.

A rich range of optionals available such as touch, proximity sensor, and Wi-Fi make it the perfect solution for any shop or retail location.

The THM has a security locking system that prevents it from theft, additionally the all frontal tempered anti-vandal proof glass protects it from any vandalism or use of aggressive cleaning agents possibly ruining the LCD.




- Major Features
- 700 NIT BRIGHTNESS
 - 24/7 USAGE
 - 4MM TEMPERED ALL FRONTAL GLASS
 - SUPER SLIM DESIGN
 - READY FOR PC OR MEDIAPLAYER INSIDE
 - INVISIBLE BRACKETS
 - HIGH QUALITY FINISHINGS
 - PCAP TOUCH AVAILABLE

STRUCTURE AND MATERIALS

- Structure in Satin Stainless Steel
- Safety 4mm tempered glass
- Easily accessible hidden USB port
- Thin enclosure
- Vandal proof grade structure (IK04)
- Special wall bracket with integrated lock


DISPLAY SIZES



OPTIONS

● Available ● Not Available ● Included ● On project

CUSTOM COLOR	BILLBOARD IN THE BACK SIDE	METAL TOP COVER	AUDIO 2X5W	TOUCH SCREEN	UMTS-4G	WI-FI	BLUETOOTH	WEBCAM	MEDIA PLAYER
YOUR LOGO	BASE + WHEELS	WALL MOUNTS	PROXIMITY IR SENSOR	SHOCK SENSOR	HVAC	SOFTWARE	ADVANCED DIAGNOSTIC	THERMAL PRINTER	CARD READER

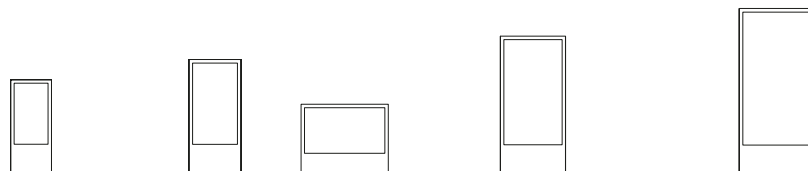

TECHNICAL SPECIFICATIONS

General	THM.P32 (Portrait)	THM.P42 (Portrait)	THM.L42 (Landscape)	THM.P55 (Portrait)	THM.P65 (Portrait)
Product code	THM.P32 (Portrait)	THM.P42 (Portrait)	THM.L42 (Landscape)	THM.P55 (Portrait)	THM.P65 (Portrait)
Screen size (inch)	32"	42"		55"	65"
Screen active area (cm)	39,2 X 69,8	52,4 X 93,1		68,1 X 121	80,3 X 142,8
Display brightness (nit)	500	700		700	700
Backlight technology	LEDedge	LEDedge		LEDedge	LEDedge
Screen resolution (pixel)	Full HD - 1920x1080	Full HD - 1920x1080		Full HD - 1920x1080	Full HD - 1920x1080
Contrast ratio	3000:1 (typ)	4000:1 (typ)		4000:1 (typ)	4000:1 (typ)
Viewing angle (H/V)	178° / 178°	178° / 178°		178° / 178°	178° / 178°
Backlight Life cycle	50.000 hours	50.000 hours		50.000 hours	50.000 hours
System operation	24/7/365	24/7/365		24/7/365	24/7/365
Screen orientation	Portrait	Portrait	Landscape	Portrait	Portrait
Screen side	Single	Single		Single	Single
Interactive touch	Projected capacitive (optional)	Projected capacitive (optional)		Projected capacitive (optional)	Projected capacitive (optional)
Environment protection	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)		Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)
Operating temperature	0°C / +40°C	0°C / +40°C		0°C / +40°C	0°C / +40°C
Environment humidity	10% - 80%	10% - 80%		10% - 80%	10% - 80%
Antivandal protection	IK04	IK04		IK04	IK04
Air cooling system	n.a.	n.a.		n.a.	n.a.
Standard color	As shown below	As shown below		As shown below	As shown below
Enclosure material	Satin Stainless Steel	Satin Stainless Steel		Satin Stainless Steel	Satin Stainless Steel
Glass	Tempered glass (4mm)	Tempered glass (4mm)		Tempered glass (4mm)	Tempered glass (4mm)
Glass reflection	No Anti-glare treatment	No Anti-glare treatment		No Anti-glare treatment	No Anti-glare treatment
Vac supply	230V AC +/- 10 (*)	230V AC +/- 10		230V AC +/- 10	230V AC +/- 10
Power consumption (Typ)	80W	105W		135W	240W
Height (cm)	107	130	82	156	190
Width (cm)	47	60	101	75	95
Depth (cm)	5	5	5	5	6
Weight (Kg)	19	23	25	35	62

(*) Elevator Special Version +24V DC



STANDARD COLORS AND FINISHING

Enclosure Colors ● Black RAL 9005
○ White RAL 9010
■ On request

Glass Colors ● Black RAL 9005
○ White RAL 9010
■ On request

TESTS AND CERTIFICATIONS

LVD 2014/35/UE
EMC 2014/30/UE
ROHS 2011/65/UE
IP Code IEC 60529
IK Rating IEC 62262

Safety of Information Technology Equipment:
IEC 60950-1
Safety Requirements of Audio, Video and Similar
Electronic Apparatus: IEC 60065



NOTE

Frontal Door with hinges on the Top.

For more information visit www.fida.it

Copyright © 2019 Fida srl